


**Instructions**

1. Reach around back of toilet to gain access to yellow rubber Fuse Holder. Taking care to avoid breaking glass fuse, pull apart to remove old Fuse. Discard.
2. Install new Fuse into Holder. Reconnect Fuse Holder to snug.
3. Flush test toilet.

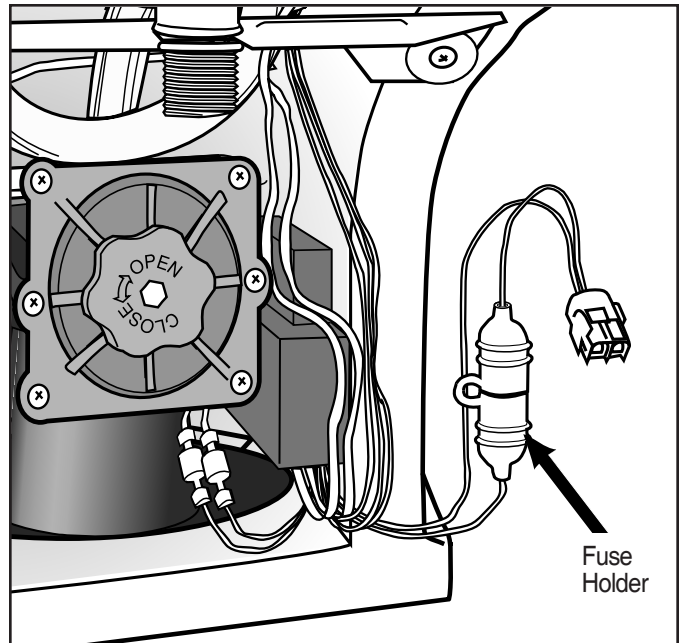


Form #19647

Rev. 7/24/03

**Instructions**

1. Reach around back of toilet to gain access to yellow rubber Fuse Holder. Taking care to avoid breaking glass fuse, pull apart to remove old Fuse. Discard.
2. Install new Fuse into Holder. Reconnect Fuse Holder to snug.
3. Flush test toilet.

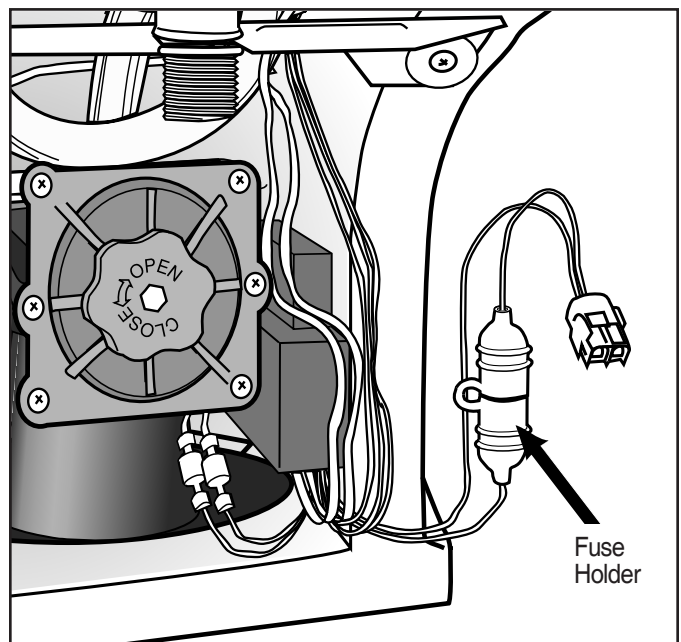

Form #19647

Rev. 7/24/03